

# LIBERTY™ SERIES

HIGH SCHOOL, COLLEGIATE & MUNICIPAL SPORTS FIELD LIGHTING SYSTEM

DESIGNED TO MEET IES RP-6 PERFORMANCE REQUIREMENTS

*Intended for use as a Basis of Design lighting system for stadium-grade sports applications.*

**800W | 1000W | 1200W**

SYSTEM CONFIGURATIONS



ETL LISTED • DLC PREMIUM • IP65 • BAA COMPLIANT

## SYSTEM ENGINEERING

Lighting system performance is achieved through forward-throw optical distribution combined with integrated visor shielding, balancing long-throw coverage and glare control through coordinated pole placement and aiming geometry.

## KEY SYSTEM ATTRIBUTES

- High-output stadium optical system
- Forward-throw optical distribution for long-distance coverage
- Integrated glare control visor system (VGS™)
- Integrated or remote driver configurations
- Die-cast aluminum construction for outdoor use

## PROJECT SUBMITTAL

PROJECT NAME

TYPE / DESIGNATION

CATALOG NUMBER

SUBMITTED BY

DATE

NOTES / REMARKS

# SYSTEM OVERVIEW & PERFORMANCE SUMMARY

## SYSTEM OVERVIEW

The Liberty™ Series is a high-output LED sports field lighting system engineered for high school stadiums, collegiate athletic venues, and municipal sports complexes.

The system combines precision forward-throw optical distributions, durable die-cast aluminum construction, and advanced thermal management to deliver uniform illumination across large athletic fields while helping control glare and off-site light spill.

Lighting systems utilizing Liberty luminaires are developed in accordance with ANSI/IES RP-6 recommendations. Illumination levels, uniformity, and aiming geometry shall be verified through project-specific photometric calculations.

LIGHTING PERFORMANCE IS ACHIEVED THROUGH SYSTEM-LEVEL COORDINATION—NOT FIXTURE OUTPUT ALONE.

Duvon sports lighting systems are designed as integrated lighting systems rather than individual luminaires.

## SYSTEM PERFORMANCE SUMMARY

ATTRIBUTE	PERFORMANCE
Typical System Efficacy	130-140 lm/W
Rated Life	L70 ≥ 100,000 hours
Ingress Protection	IP65
Surge Protection	10 kV (std) / 20 kV (opt)
Operating Temperature	-40°F to +131°F



## PRIMARY APPLICATIONS

### COMPETITIVE STADIUMS

High school football stadiums, collegiate athletics, soccer & lacrosse complexes, baseball & softball fields, multi-sport athletic complexes.

### MUNICIPAL INFRASTRUCTURE

Public recreation complexes, tournament sports venues, municipal athletic parks, outdoor event venues.

### TYPICAL MOUNTING CONDITIONS

**Typical pole heights: 60–80 ft.** Final mounting height, pole spacing, and aiming angles shall be determined through project-specific photometric analysis.

## ENGINEERING & DESIGN SUPPORT

Duvon provides lighting system design assistance including luminaire selection, optical configuration, and photometric verification.

Duvon engineering services include:

- AGi32 photometric simulations
- Pole placement recommendations
- Fixture aiming schedules
- Glare analysis
- Spill-light evaluation
- Structural loading review

These services assist architects, engineers, and municipalities in lighting design verification.

# LIGHTING PERFORMANCE

## REFERENCE STANDARD


Lighting designs utilizing Liberty luminaires are developed in accordance with ANSI/IES RP-6.

SPORT APPLICATION	AVG ILLUMINANCE	AVG:MIN	MAX:MIN	IES CLASS
Recreational Soccer / Football	20–30 fc	≤2.5:1	≤3.0:1	Class III
High School Football	30–50 fc	≤2.0:1	≤2.5:1	Class II
Baseball / Softball Recreational	Infield 50 fc / Outfield 30 fc	≤2.5:1	≤3.0:1	Class III
Baseball / Softball Competitive	Infield 70 fc / Outfield 50 fc	≤2.0:1	≤2.5:1	Class II
Collegiate / Tournament Stadium	75–100 fc	≤1.5:1	≤2.0:1	Class I

Illumination and uniformity values represent design targets and shall be verified through project-specific photometric calculations.


## VERTICAL ILLUMINANCE

Lighting calculations may include vertical illuminance evaluation to support ball tracking and athlete visibility. This is particularly critical for baseball, softball, soccer, and lacrosse applications.

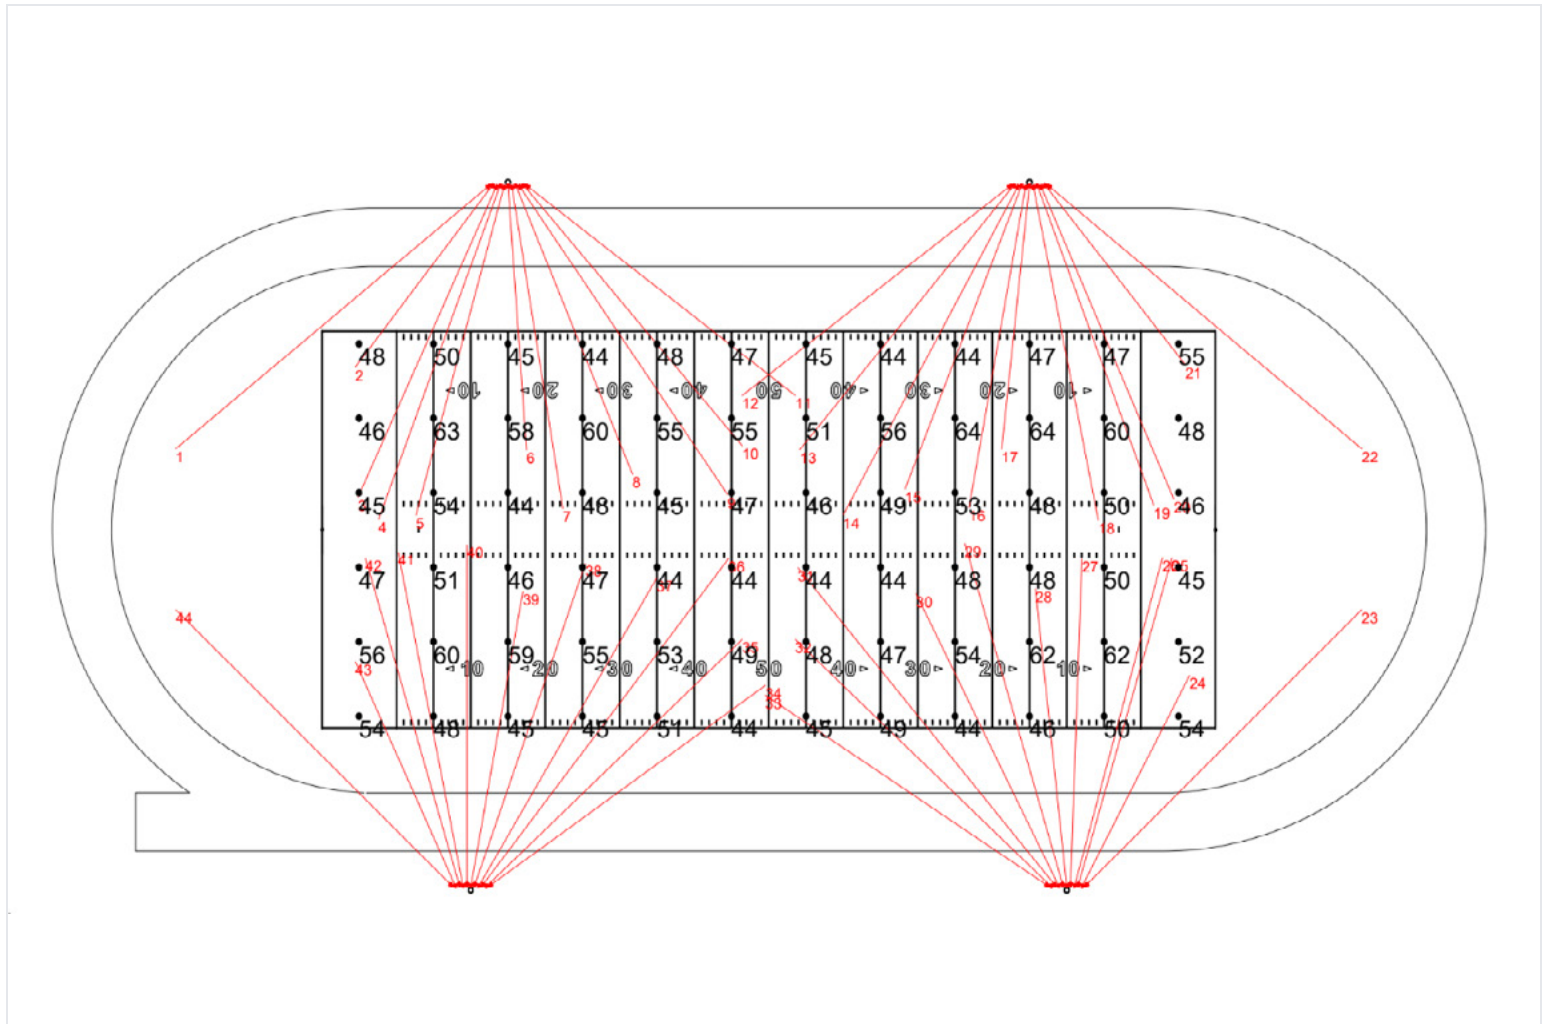


Sample photometric calculation – 40 fc average football field design


# OPTICAL DISTRIBUTIONS

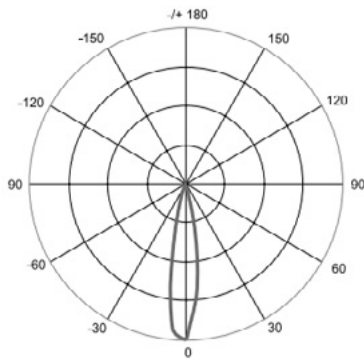

**TYPE A (15°)**

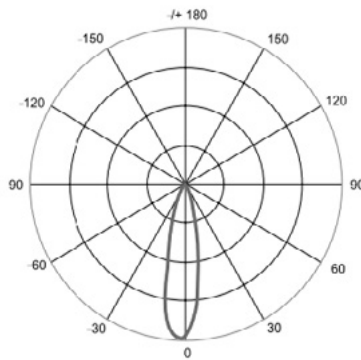

**TYPE B (25°)**

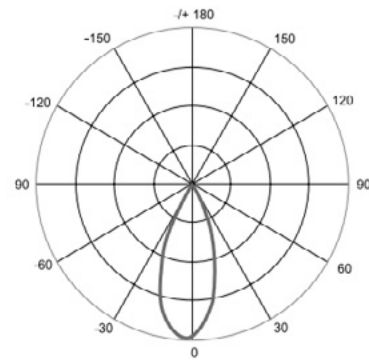

**TYPE C (45°)**

DISTRIBUTION TYPE	BEAM ANGLE	TYPICAL APPLICATION
TYPE A	15°	Ultra-narrow long-throw
TYPE B	25°	Primary stadium coverage
TYPE C	45°	Sideline and in-field fill

Liberty™ luminaires are available with multiple stadium optical distributions.

## OPTICAL SYSTEM

The Liberty™ system uses precision forward-throw optics designed to project light from perimeter poles into the field center. Recessed LED arrays and integrated visor shielding reduce direct source visibility and improve player visual comfort.

## GLARE CONTROL — VGS™ VISOR SYSTEM

The integrated visor system features a matte-black internal finish designed to eliminate internal light reflection and spill-light bounce. The optical assembly is designed to limit light above the 90° plane when properly aimed, helping control glare and light trespass.



Standard



VGS 1 (Std. included)  
4.5 in



VGS 2  
8 in



VGS 3  
16.5 in

# ELECTRICAL & MECHANICAL SPECIFICATIONS

## LUMEN OUTPUT

MODEL	WATTS	LUMEN OUTPUT
LIBERTY-800	800 W	104,000 lm
LIBERTY-1000	1000 W	130,000 lm
LIBERTY-1200	1200 W	144,000 lm

## TYPICAL SYSTEM EFFICACY

### 130-140 lm/W

Depending on wattage, CCT, and driver configuration.

## INPUT CURRENT (AMPERAGE)

VOLTAGE	800W	1000W	1200W
120V	6.67 A	8.33 A	10.00 A
208V	3.85 A	4.81 A	5.77 A
240V	3.33 A	4.17 A	5.00 A
480V	1.67 A	2.08 A	2.50 A

Input current values are nominal. Final branch circuit sizing shall be verified in accordance with NEC and project requirements.

## ELECTRICAL CHARACTERISTICS

ATTRIBUTE	PERFORMANCE
Input Voltage	100-277 V std. (277-480 V opt.)
Driver Type	Constant Current LED Driver
Driver Manufacturer	Inventronics
Surge Protection	10 kV std. (20 kV opt.)
Dimming	0-10 V compatible
LED Lifetime	L70 ≥ 100,000 hours
Operating Temperature	-40°F to +131°F
Ingress Protection	IP65

### BROADCAST & FLICKER PERFORMANCE

The Liberty™ system supports flicker-free driver operation (<1%), suitable for high-speed video recording. Optional configurations support TLCI ≥ 90 for television-ready sports lighting environments.

### ENERGY SAVINGS

The Liberty™ system can reduce energy consumption compared to traditional HID stadium lighting systems, depending on application

## MECHANICAL CONSTRUCTION

COMPONENT	SPECIFICATION
Housing	Die-cast aluminum
Finish	Polyester powder coating
Hardware	Stainless steel external fasteners
Mounting	Adjustable yoke bracket
Tilt Adjustment	±75°

## THERMAL MANAGEMENT

High-power stadium luminaires must address heat buildup and environmental debris.

The Liberty™ housing incorporates:

- Deep-fin aluminum heat sink
- Passive convection cooling channels
- Debris-resistant airflow paths

This design minimizes heat accumulation and prevents dirt or bird debris from blocking cooling surfaces.

## FIXTURE WEIGHT (LUMINAIRE HEAD ONLY)

MODEL	WEIGHT-INT	WEIGHT-BR
LIBERTY-800	65.5 lbs	70.9 lbs
LIBERTY-1000	66.8 lbs	71.4 lbs
LIBERTY-1200	68.3 lbs	72.6 lbs

INT = integrated driver on back of fixture. BR = driver on bracket.

## EFFECTIVE PROJECTED AREA (EPA)

0.58-1.38 ft²

### STRUCTURAL CONSIDERATIONS

Fixture EPA values are provided to support structural analysis per ASCE 7-22. Final pole design and wind resistance must be verified by a licensed structural engineer.

# SYSTEM CONTROLS

Liberty™ luminaires support remote driver architecture.

Drivers may be installed in a NEMA 4X stainless steel cabinet located at ground level or mid-pole.

Advantages include:

- Ground-level maintenance
- Reduced pole-top weight
- Improved thermal stability

## VOLTAGE DROP COMPENSATION

Remote driver systems incorporate voltage-drop compensation technology to maintain consistent lumen output across cable runs exceeding 100 ft vertical height.

## LIGHTING CONTROLS

Optional lighting control platforms include:

- Zigbee wireless control
- Wireless DMX stadium control

Control capabilities:


- On/off
- Scheduled operation
- Scene-based dimming
- Energy monitoring
- Dynamic lighting effects

## SYSTEM PERFORMANCE VERIFICATION


Lighting systems utilizing Duvon sports luminaires may include project documentation such as:

- Photometric reports verifying illumination levels & uniformity
- Pole layout drawings
- Fixture aiming diagrams
- IES photometric files
- Electrical load information
- Structural data including fixture weight and EPA values

# DIMENSIONAL DATA

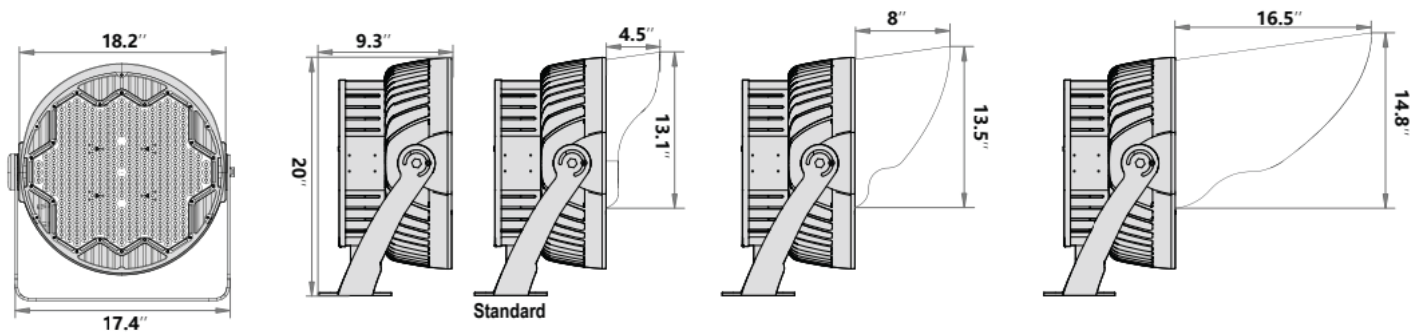

## YOKE BRACKET

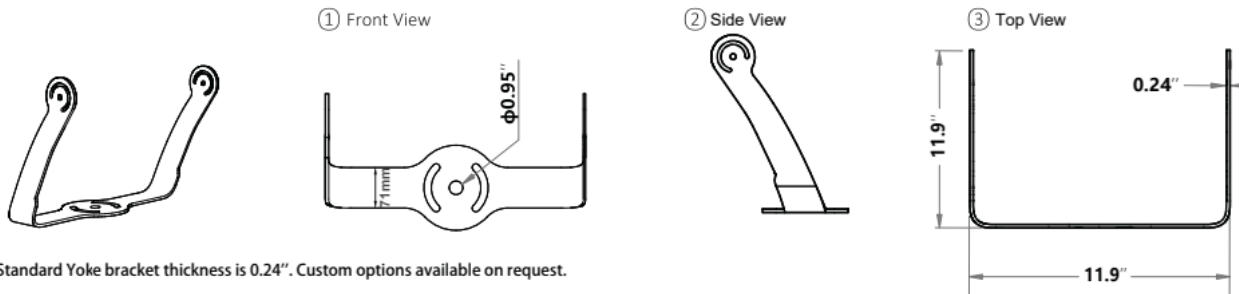

Standard Yoke bracket thickness is 0.24". Custom options available on request.

# REMOTE DRIVER CABINET CONFIGURATIONS

Final cabinet loading, wiring configuration, and thermal performance shall be verified based on driver configuration and environmental conditions.

## SMALL DRIVER CABINET



### DIMENSIONS

13.75" x 16.5" x 14"

## LARGE DRIVER CABINET



### DIMENSIONS

33.75" x 16.75" x 14"



### GROUND-LEVEL SERVICE ACCESS

NEMA 4X Stainless Steel cabinets available upon specification. Please consult factory for wiring diagrams and conduit requirement schedules.

# ORDERING INFORMATION & SUBMITTAL SCHEDULE

## MODEL SELECTION BUILDER

MODEL	WATTS	CCT	CRI	OPTIC	VOLTAGE	DRIVER	OPTIONS
LIBERTY	800	40K	<b>70</b> 80	A	<b>STD</b> HV	INT REM	<b>VGS1</b>
	1000	50K		B			VGS 2
	1200	<b>57K</b>		C			VGS 3 DC SC DMX

Bold values indicate standard configuration.

### CATALOG NUMBER EXAMPLE

LIBERTY-1000-50K-80-B-HV-REM-VGS2-DC

### CONFIGURATION CODES

#### CCT

40K = 4000K

50K = 5000K

57K = 5700K

#### OPTICS

A = 15°

B = 25°

C = 45°

#### VOLTAGE

STD = 100-277V

HV = 277-480V

#### DRIVER

INT = INTEGRATED

REM = REMOTE

#### OPTIONS

VGS = VISOR GLARE SHIELD

DC = DRIVER CABINET

SC = SMART CONTROL

DMX = STADIUM CONTROL

### FIXTURE SCHEDULE

TYPE	CATALOG NUMBER	QTY

Final configuration shall be verified against project-specific electrical and photometric requirements.

# DUVON LIGHTING LLC

710 ARMSTRONG DR. • BUFFALO GROVE, IL 60089

P: (224) 567-8312 E: SALES@DUVONLIGHTING.COM WWW.DUVONLIGHTING.COM



LIBERTY™ SERIES  
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE